

# PREVENTION OF PREMATURE COLLAPSE A GUIDE TO THE DESIGN, INSTALLATION AND INSPECTION OF CABLE MANAGEMENT SYSTEMS



Version 3

September 2026

# ABOUT BEAMA

BEAMA is the long established and respected trade association for the electrotechnical sector. The association has a strong track record in the development and implementation of standards to promote safety and product performance for the benefit of manufacturers and their customers.

Details of other BEAMA Guides can be found on the BEAMA website  
[www.beama.org.uk](http://www.beama.org.uk)

## Acknowledgements

BEAMA would like to thank London Fire, the IET, Hampshire & Isle of Wight Fire & Rescue Service and the Hampshire Constabulary for their support and permission to use their published information.

## DISCLAIMER

This publication is subject to the copyright of BEAMA Ltd. While the information herein has been compiled in good faith, no warranty is given or should be implied for its use and BEAMA hereby disclaims any liability that may arise from its use to the fullest extent permitted under applicable law.

© BEAMA Ltd 2026

Copyright and all other intellectual property rights in this document are the property of BEAMA Ltd. Any party wishing to copy, reproduce or transmit this document or the information contained within it in any form, whether paper, electronic or otherwise should contact BEAMA Ltd to seek permission to do so.

# COMPANIES INVOLVED IN THE PREPARATION OF THIS GUIDE



## ABB Ltd

Tower Court, Courtaulds Way  
Foleshill Enterprise Park  
Coventry, West Midlands CV6 5NX  
Tel: +44 (0) 2476 368 500  
<https://new.abb.com/uk>



## Atkore International

Delta Point, West Bromwich B70 9PL  
Tel: 0121 580 6300  
[www.atkore.com](http://www.atkore.com)



## Cableflow International Ltd

Windsor House, Abbey Barn Road,  
High Wycombe, Bucks HP11 1NN  
Tel: 01494 52 88 11  
[www.cableflow.com](http://www.cableflow.com)



## CMD Ltd

Sycamore Road, Eastwood Trading Estate,  
Rotherham S65 1EN  
Tel: 01709 829511  
[www.cmd-ltd.com](http://www.cmd-ltd.com)



## CMP Products Ltd

Nelson Way, Cramlington NE23 1WH  
Tel: 0191 265 7411  
[www.cmp-products.com](http://www.cmp-products.com)



## Cutterwell & Co

1 Manor Industrial Estate, Flint, CH6 5UY  
Tel: 03316 303280  
[www.cutterwell.co.uk](http://www.cutterwell.co.uk)



## Univolt Uk Ltd

A1 Connect Unit 2, Cole Green Lane,  
Welwyn Garden City, AL7 4FW  
Tel: 01707 379 820  
[www.univolt.co.uk](http://www.univolt.co.uk)



Holding Power

## Ellis Patents Ltd

High St, Rillington, Malton YO17 8LA  
Tel: 01944 758395  
[www.ellispatents.co.uk](http://www.ellispatents.co.uk)



## Gripple Ltd

Savile St E, Sheffield S4 7UQ  
Tel: 0114 275 2255  
[www.gripple.com](http://www.gripple.com)



## Honeywell Building Technologies

The Arnold Centre, Paycocke Road,  
Basildon SS14 3EA  
Tel: 01268 563 000  
[www.mkelectric.com](http://www.mkelectric.com)



## Legrand Electric

Great King Street North, Birmingham B19 2LF  
Tel: +44 (0) 370 608 9020  
Email: [powersales.uk@legrand.co.uk](mailto:powersales.uk@legrand.co.uk)  
[www.legrand.co.uk](http://www.legrand.co.uk)



## Marshall-Tufflex

55-65 Castleham Rd, St Leonards on Sea,  
East Sussex TN38 9NU  
Tel: 01424 856600  
[www.marshall-tufflex.com](http://www.marshall-tufflex.com)



## Philip Grahame International Ltd

Montrose Rd, Dukes Park Industrial Estate,  
Chelmsford CM2 6TE  
Tel: 01245 451717  
[www.philipgrahame.co.uk](http://www.philipgrahame.co.uk)



## Prysmian Group

Chicken Hall Lane, Eastleigh SO50 6YU  
Tel: 0870 513 3143  
[www.prysmiangroup.com/en](http://www.prysmiangroup.com/en)



## Unitrunk Ltd

Blaris Industrial Estate, Altona Road,  
Lisburn, BT27 5QB  
Tel: 02892 625100  
[www.unitrunk.co.uk](http://www.unitrunk.co.uk)



## Vantrunk Ltd

Blaris Industrial Estate, Altona Road,  
Lisburn, BT27 5QB  
Tel: 02892 625100  
[www.unitrunk.co.uk](http://www.unitrunk.co.uk)



## Zip-Clip Ltd

Offas Dyke Business Park, Welshpool, Powys  
SY21 8SS  
Tel: 01686 623366  
[www.zip-clip.com](http://www.zip-clip.com)

# CONTENTS

|    |                             |    |
|----|-----------------------------|----|
| 1  | Introduction                | 05 |
| 2  | Scope                       | 05 |
| 3  | Exclusions from Scope       | 06 |
| 4  | Definitions & Abbreviations | 06 |
| 5  | Wiring System Zones         | 07 |
| 6  | Spacing                     | 10 |
| 7  | Installation Requirements   | 10 |
| 8  | Conclusion                  | 14 |
| 9  | Bibliography                | 14 |
| 10 | Appendices                  | 15 |



# PREMATURE COLLAPSE BEAMA CABLE MANAGEMENT TECHNICAL COMMITTEE (CMTC)

## 1. Introduction

Following the Grenfell Tower tragedy and the subsequent Hackitt Report, the UK Government in December 2018 issued a publication entitled 'Building A Safer Future – An Implementation Plan', whilst also approaching the electrical industry for its support to implement the recommendations contained within the report. BEAMA responded by stating that its members are committed to work with Government to achieve the recommendations and in respect of cable management systems to investigate measures that could be taken to improve the performance of cable management systems to improve fire safety.

Some work had been carried out by the IET prior to the Grenfell tragedy following another fire in a high-rise building – a fire had taken place in Shirley Towers which is a 15-storey concrete tower block of 150 apartments located in the Shirley area of Southampton. In the process of fighting the fire and attempting to clear the building two firefighters died. As an evacuation was attempted, escaping firefighters became entangled in fallen cables, both inside and outside the compartment after the heat from the fire had melted the plastic trunking, they were contained in.

Following the Coroner's inquest, recommendations were made to the UK Government to improve wiring regulations to ensure fire resistant cable support. The IET then amended the 17th Edition Wiring Regulations (BS 7671)

regulations with the publication of Amendment 3, clause 521.11.201. This requirement was subsequently further clarified in the 18th Edition of BS 7671 (521.10.202) stating that *'wiring systems shall be supported such that they will not be liable to premature collapse in the event of a fire.'*

Note 5 has been added to BS 7671:2018+A4:2026 with further clarification. That it is not the intent of this regulation to provide support to maintain circuit integrity.

Unfortunately, the term 'premature collapse' was not defined and rather than offer clarity to installers this may have added confusion. Furthermore, the fact that there are currently no fire rating tests for the performance of cable management systems within the harmonised product standards, installers have a problem when their clients specify fire safety performance levels for installations.

BEAMA members who represent many of the leading UK cable management manufacturers have been working on further guidance in this area. In conjunction with many stakeholders, including the fire services, the following guidance has been established for installers.

BEAMA have produced a 'Technical Specification' which is available for FREE, that defines test methods for cable management products that will aid compliance with Regulation 521.10.202.

See appendices B and C.

Appendix B: Examples of poor installations that could lead to disaster.

Appendix C: Images from the Shirley Towers report

## 2. Scope

The purpose of this Guidance document is to aid installers to select and erect Wiring Systems to prevent cables from premature collapse due to the effects of heat caused by fire.

Cable Management Systems manufactured from thermoplastic materials such as PVC-U will soften at around 80°C – 100°C and be molten from 180°C – 200°C. Therefore, the retention of cables in the event of a fire is unlikely. Systems manufactured from metallic materials with low melting points and composite materials may also be susceptible to premature collapse in the event of a fire.

To overcome this issue metallic devices may be used, internally and / or externally to the system as advised by the manufacturer.

The purpose of the document is to verify compliance with current 18th Edition IET Wiring Regulations (BS7671:2018+A4:2026) regulation 521.10.202. This guidance is to be used for all Wiring Systems (as per BS 7671 110.1.2), which includes fixed wiring for information and communication technology, signalling, cables above false ceilings, control cables and similar systems.



### Construction Fixings:

Construction (substrate) fixing devices are not within the scope of this guidance document. BEAMA members do not represent fixing manufacturers so are unable to offer guidance on such devices. It is crucial that installers liaise with the manufacturers of these fixings to ensure they are suitable to enable the finished installation to meet the requirements of the Regulation.

Web: [www.the-cfa.co.uk](http://www.the-cfa.co.uk) • Email: [info@the-cfa.co.uk](mailto:info@the-cfa.co.uk) • Tel: 0116 274 7358

### 3. Exclusions from Scope

- 3.1** The electrical performance of wiring systems is not within the scope of this Regulation and therefore not a consideration within this guidance document. The following standards BS 5839 and BS 8519 cover these topics.
- 3.2** Cables buried in walls and floors.
- 3.3** Make-up and performance of substrate.
- 3.4** Reaction to fire and smoke emissions.
- 3.5** Fire propagation and spread of fire between compartments.
- 3.6** BS EN 61534 series Powertrack.
- 3.7** Underfloor cable management installations.
- 3.8** BS EN 61439-6 Busbar.
- 3.9** Construction (substrate) fixing devices as defined in section 4.3.

### 4. Definitions and Abbreviations

#### 4.1 Cable Management System (CMS):

Assembly including different system components intended for the accommodation of insulated conductors, cables and possibly other electrical equipment in electrical and/or communication systems.

*Note: Examples of cable management systems are cable tray systems, mesh cable tray systems, cable ladder systems, cable trunking systems, conduit systems, cable ducting systems, cable cleats, cable ties.*

#### 4.2 Collapse:

- (of a structure) suddenly fall down or give way.
- cause (something) to fall down or give way.
- fail suddenly and completely.
- an instance of a structure falling down or giving way.

#### 4.3 Construction Fixing Device (CFD):

A component used to secure the CMS or a component of the CMS to the building structure (substrate).

#### 4.4 Escape Route:

Path to follow for access to a safe area in the event of an emergency.

#### 4.5 Horizontal Movement:

Occurs when wiring installed vertically moves away from its installed position in a horizontal direction (see Figure 2).

#### 4.6 Load (volume):

A maximum allowable volume of cables within a CMS.

#### 4.7 Load (mass):

A maximum allowable mass of cables within a CMS.

#### 4.8 Looping of Wiring Systems:

Common practice where single or groups of cables are often 'looped' to provide slack within the installation. (see appendix D).

#### 4.9 Premature:

Occurring or done before the usual or proper time; too early.

#### 4.10 Reaction to Fire:

Response of a CMS in contributing by its own decomposition to a fire, to which it is exposed, under specified conditions.

#### 4.11 Suspension:

The threaded rod, wire rope, channel or other bracketry system installed from the CFD to the cable management system.

#### 4.12 Vertical Movement:

Occurs when wiring installed horizontally moves away from its installed position in a vertical direction (see Figure 2).

#### 4.13 Wiring System:

An assembly made up of cable or busbars and parts which secure and, if necessary, enclose the cable or busbars. (BS7671:2018+A4:2026).

#### 4.14 Wiring System Bundles:

Bundling / grouping of more than one cable together (See appendix E).

#### 4.15 Substrate:

Building materials commonly used in the construction industry, for example; on which paint is to be applied. Usual substrates include concrete, drywall, wood and steel / metal.

5. Wiring System Zones

5.1 In the following table the Zones are numbered to enable specifiers, designers, and installers to understand where the requirements are to be applied, see table 1 and figures 1, 2 & 3:

Note: The zone temperatures have been advised by London Fire Brigade (LFB).

CMS installed within zone A can encroach into zone C. Displacement is measured from the installation point.


Table 1

| Zone Ref    | A          | B     | C    |
|-------------|------------|-------|------|
| Height (mm) | ≥800 ≤2100 | >2100 | <800 |

Table 2

| Zone Ref                 | A                 | B                 | C                 |
|--------------------------|-------------------|-------------------|-------------------|
| <sup>1</sup> Temperature | 650°C -0°C +40 °C | 650°C -0°C +40 °C | 200°C -0°C +40 °C |

Figure 1 – Installation Zones A, B & C

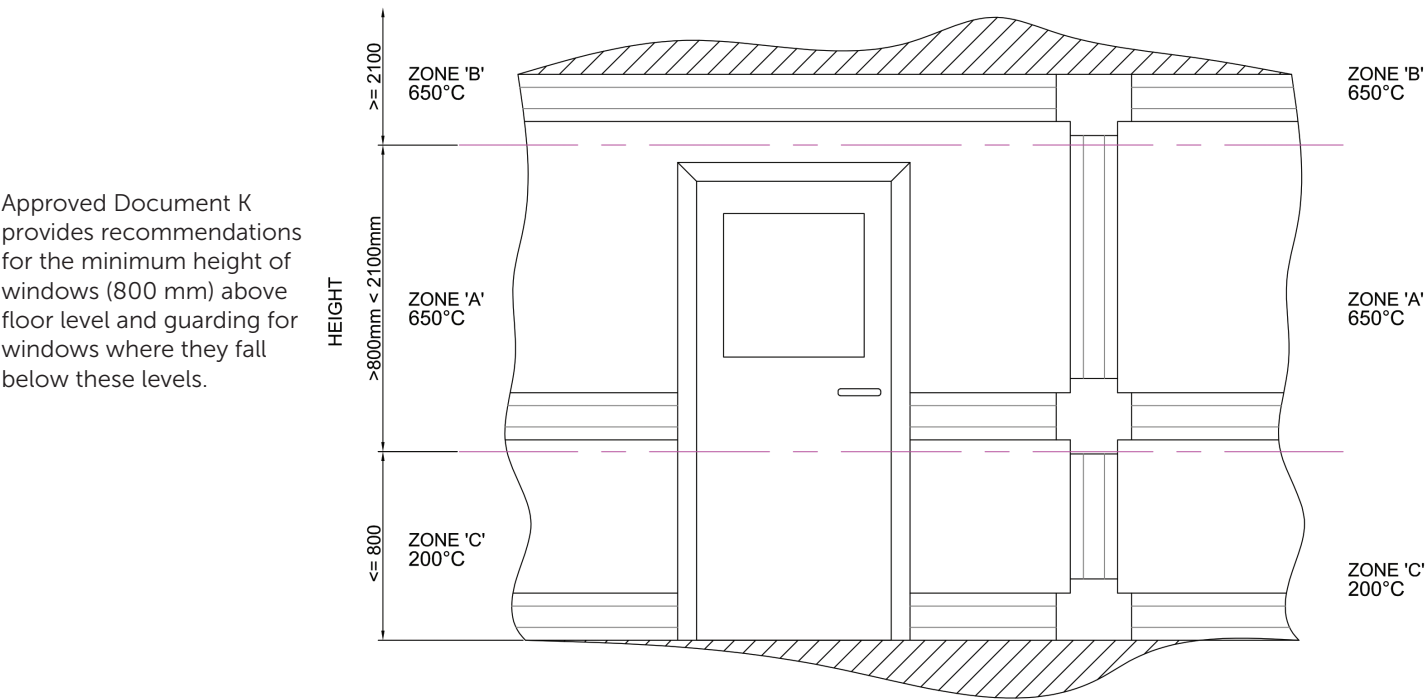

<sup>1</sup> As per the Cellulosic curve (ISO-834, BS 476 & DIN 4102)

## 5.2 Horizontal Runs:

For horizontal runs in zone A the vertical movement as a result of fire, of the wiring system or its contents shall not be greater than **300 mm** (See figure 1, 2 and 3).

*Note: The measured deflection during testing of horizontal CMS systems must be taken into account for the installation height when CMS is installed within Zone B. Such that the tested deflection does encroach into Zone A.*



**IMPORTANT:** For installations in zone 'B' any movement of the wiring system or its contents should not result in any part of the installation entering zone 'A'. (See figure 1, 2 and 3)

## 5.3 Vertical Runs:

For vertical runs in zones 'A' and 'C' the horizontal movement, as a result of fire, of the wiring system or its contents shall not be greater than 150 mm (See figure 3).

When products are not supplied as a system from a single manufacturer the following shall be considered:

*When a CMS is supported using a vertical support (E.g. Trapeze bracket) the total deflection (sum of) the support and the horizontal CMS needs to be taken in to account.*

*Note: Adequate provision shall be made to allow the continued opening of a non-standard door. (See figure 4).*

*Note: The Wiring System in this context does not include lids, covers and sundry parts.*

Figure 3


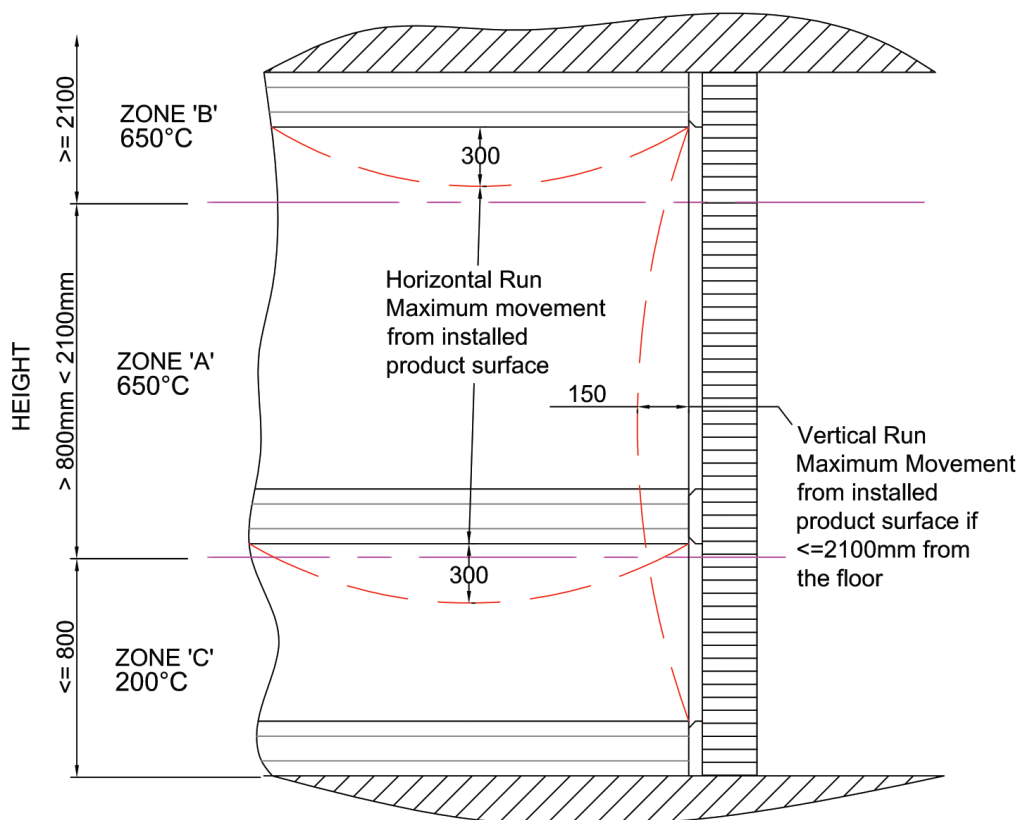


Figure 4: Stairwell installation

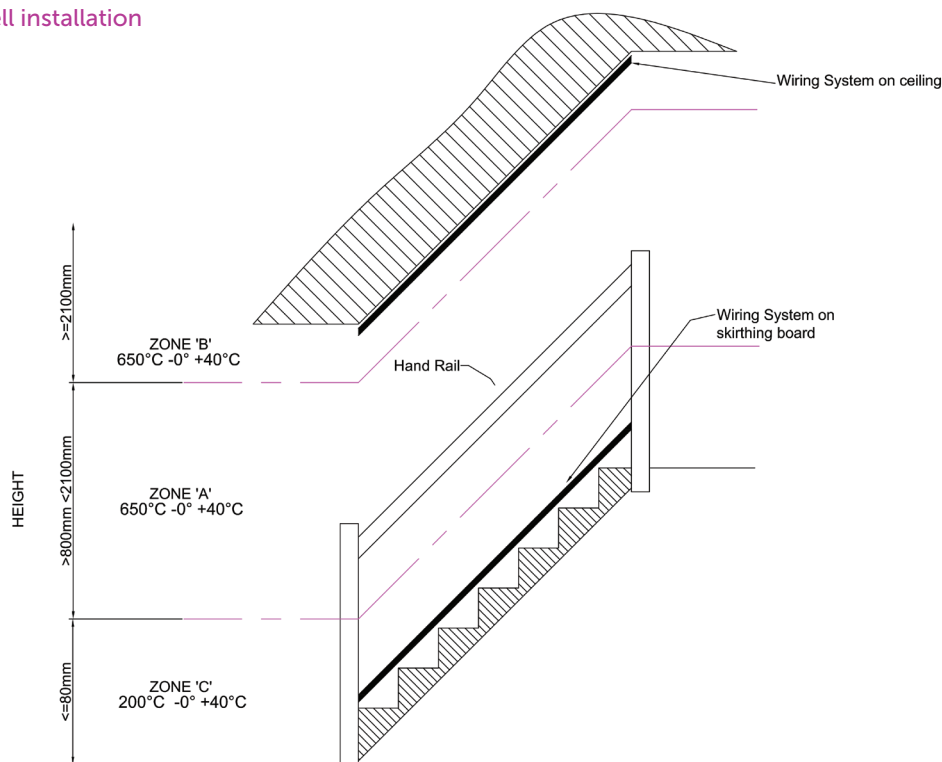

#### 5.4 Exclusion Zone:


To prevent any movement of the Wiring System from obstructing a doorway in the event of a fire, no Wiring System parts shall be installed within 150 mm either side of a door opening or less than 300 mm above a door opening, see figure 5.

Where this is not possible, a risk assessment can be made and alternate materials such as metal conduit or enclosed

trunking may be used. No movement of the Wiring System or its content is allowed.

**Exception:** Wiring required for door connected services (i.e., alarms, sensors etc.) which must pass through the exclusion zone must be kept to a minimum and take the shortest path through the zone.

Figure 5: Solid hatch area denotes the exclusion zone

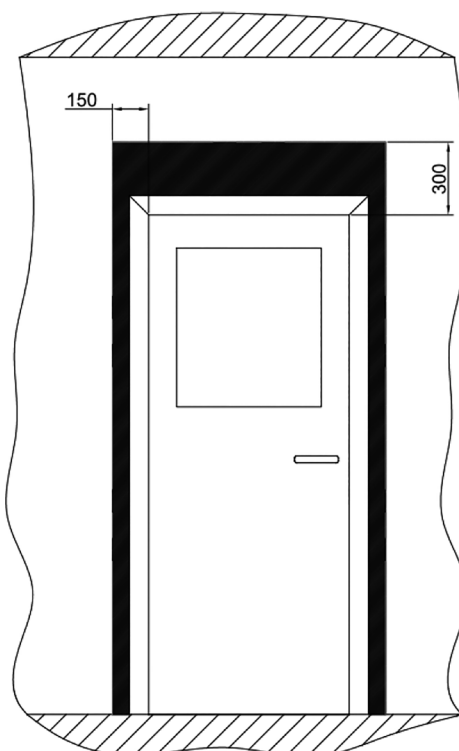

## 6." Spacing

### 6.1 Spacing of cable cleats, clips and/or ties:

The spacing of cable cleats, clips and/or ties must be in accordance with IET 'On Site Guide' Appendix D, Table D1 (see table 2 below). Supplementary or replacement heat resistant cable cleats, clips and or ties shall be used to achieve conformance with regulation 521.10.202 and section 5 of this guidance document.

*Note: Must be in accordance with manufacturer's instructions or guidance can be found within the IET on site guide.*

**Table 3: Spacings of supports for cables in accessible positions**

| Overall diameter of cable, d* (mm)<br><br>1 | Maximum spacing of clips (mm)                                     |                 |                   |                 | Mineral insulated copper sheathed or aluminium sheathed cables |                 |
|---------------------------------------------|-------------------------------------------------------------------|-----------------|-------------------|-----------------|----------------------------------------------------------------|-----------------|
|                                             | Non-armoured thermosetting of thermoplastic (PVC) sheathed cables |                 | Armoured cables   |                 |                                                                |                 |
|                                             | Generally                                                         |                 |                   |                 |                                                                |                 |
|                                             | Horizontal †<br>2                                                 | Vertical †<br>3 | Horizontal †<br>4 | Vertical †<br>5 | Horizontal †<br>6                                              | Vertical †<br>7 |
| d ≤ 9                                       | 250                                                               | 400             | -                 | -               | 600                                                            | 800             |
| 9 < d ≤ 15                                  | 300                                                               | 400             | 350               | 450             | 900                                                            | 1200            |
| 15 < d ≤ 20                                 | 350                                                               | 450             | 400               | 550             | 1500                                                           | 2000            |
| 20 < d ≤ 40                                 | 400                                                               | 550             | 450               | 600             | -                                                              | -               |

#### Notes:

For the spacing of supports for cables having an overall diameter exceeding 40 mm, the manufacturer's recommendations should be observed.

- For flat cables taken as the dimension of the major axis.

† The spacings stated for horizontal runs may be applied also to runs at an angle of more than 30° from the vertical. For runs at an angle of 30° or less from the vertical spacings are applicable.

### 6.2 Trunking and conduit systems:

Trunking and conduit systems that have a melt temperature below 650°C shall have supplementary heat resistant cable cleats, clips and or ties spaced in accordance with 6.1.

*Note: The design and materials from which the clip is manufactured may vary between manufacturers and may influence the required number and spacing of clips needed to support the Wiring System, always consult the installation instructions provided by the manufacturer.*

## 7. Installation Requirements

### 7.1 Physical Load:

Cable Management Systems are often overflowing and over filled with cables. The maximum allowable load placed on or within the component parts of tray and basket (BS EN 61537) is to be declared in the manufacturer's instructions. For cable capacities for trunking and conduit (BS EN 50085 and BS EN 61386) the following tables from the IET On-Site Guide Appendix E should be referenced (See figures 7 – 11), or seek advice from the manufacturer.

**Table 4: Cable factors for use in conduit in short straight runs**

| Type of conductor | Conductor cross-sectional area (mm <sup>2</sup> ) | Cable factor |
|-------------------|---------------------------------------------------|--------------|
| Solid             | 1                                                 | 22           |
|                   | 1.5                                               | 27           |
|                   | 2.5                                               | 39           |
| Stranded          | 1.5                                               | 31           |
|                   | 2.5                                               | 43           |
|                   | 4                                                 | 58           |
|                   | 6                                                 | 88           |
|                   | 10                                                | 146          |
|                   | 16                                                | 202          |
|                   | 25                                                | 385          |

**Table 5: Conduit factors for use in short straight runs**

| Conduit diameter (mm) | Conduit factor |
|-----------------------|----------------|
| 16                    | 290            |
| 20                    | 460            |
| 25                    | 800            |
| 32                    | 1400           |
| 38                    | 1900           |
| 50                    | 3500           |
| 63                    | 5600           |

**Table 6: Cable factors for use in conduit in long straight runs over 3 m, or runs of any length incorporating bends**

| Type of conductor                | Conductor cross-sectional area (mm <sup>2</sup> ) | Cable factor |
|----------------------------------|---------------------------------------------------|--------------|
| <b>Solid<br/>or<br/>Stranded</b> | 1                                                 | 16           |
|                                  | 1.5                                               | 22           |
|                                  | 2.5                                               | 30           |
|                                  | 4                                                 | 43           |
|                                  | 6                                                 | 58           |
|                                  | 10                                                | 105          |
|                                  | 16                                                | 145          |
|                                  | 25                                                | 217          |

Note: The inner radius of a conduit bend should be not less than 2.5 times the outside diameter of the conduit.

**Table 7: Conduit factors for runs incorporating bends and long straight runs**

| Length of run (m) | Conduit diameter (mm)     |     |     |     |          |     |     |     |           |     |     |     |     |     |     |     |            |     |     |     |
|-------------------|---------------------------|-----|-----|-----|----------|-----|-----|-----|-----------|-----|-----|-----|-----|-----|-----|-----|------------|-----|-----|-----|
|                   | 16                        | 20  | 25  | 32  | 16       | 20  | 25  | 32  | 16        | 20  | 25  | 32  | 16  | 20  | 25  | 32  | 16         | 20  | 25  | 32  |
|                   | Straight                  |     |     |     | One bend |     |     |     | Two bends |     |     |     |     |     |     |     | Four bends |     |     |     |
| 1                 | Covered by Tables 3 and 4 |     |     |     | 188      | 303 | 543 | 947 | 177       | 286 | 514 | 900 | 158 | 256 | 463 | 818 | 130        | 213 | 388 | 692 |
| 1.5               |                           |     |     |     | 182      | 294 | 528 | 923 | 167       | 270 | 487 | 857 | 143 | 233 | 422 | 750 | 111        | 182 | 333 | 600 |
| 2                 |                           |     |     |     | 177      | 286 | 514 | 900 | 158       | 256 | 463 | 818 | 130 | 213 | 388 | 692 | 97         | 159 | 292 | 529 |
| 2.5               |                           |     |     |     | 171      | 278 | 500 | 878 | 150       | 244 | 442 | 783 | 120 | 196 | 358 | 643 | 86         | 141 | 260 | 474 |
| 3                 |                           |     |     |     | 167      | 270 | 487 | 857 | 143       | 233 | 422 | 750 | 111 | 182 | 333 | 600 |            |     |     |     |
| 3.5               | 179                       | 290 | 521 | 911 | 162      | 263 | 475 | 837 | 136       | 222 | 404 | 720 | 103 | 169 | 311 | 563 |            |     |     |     |
| 4                 | 177                       | 286 | 514 | 900 | 158      | 256 | 463 | 818 | 130       | 213 | 388 | 692 | 97  | 159 | 292 | 529 |            |     |     |     |
| 4.5               | 174                       | 282 | 507 | 889 | 154      | 250 | 452 | 800 | 125       | 204 | 373 | 667 | 91  | 149 | 275 | 500 |            |     |     |     |
| 5                 | 171                       | 278 | 500 | 878 | 150      | 244 | 442 | 783 | 120       | 196 | 358 | 643 | 86  | 141 | 260 | 474 |            |     |     |     |
| 6                 | 167                       | 270 | 487 | 857 | 143      | 233 | 422 | 750 | 111       | 182 | 333 | 600 |     |     |     |     |            |     |     |     |
| 7                 | 162                       | 263 | 475 | 837 | 136      | 222 | 404 | 720 | 103       | 169 | 311 | 563 |     |     |     |     |            |     |     |     |
| 8                 | 158                       | 256 | 463 | 818 | 130      | 213 | 388 | 692 | 97        | 159 | 292 | 529 |     |     |     |     |            |     |     |     |
| 9                 | 154                       | 250 | 452 | 800 | 125      | 204 | 373 | 667 | 91        | 149 | 275 | 500 |     |     |     |     |            |     |     |     |
| 10                | 150                       | 244 | 442 | 783 | 120      | 196 | 358 | 643 | 86        | 141 | 260 | 474 |     |     |     |     |            |     |     |     |

**Additional factors:**

For 38 mm diameter use 1.4 x (32 mm factor)

For 50 mm diameter use 2.6 x (32 mm factor)

For 63 mm diameter use 4.2 x (32 mm factor)

**Table 8: Cable factors for trunking**

| Type of conductor | Conductor cross-sectional area (mm <sup>2</sup> ) | PVC BS 6004 Cable factor | Thermosetting BS 721 I Cable factor |
|-------------------|---------------------------------------------------|--------------------------|-------------------------------------|
| <b>Solid</b>      | 1.5                                               | 8.0                      | 8.6                                 |
|                   | 2.5                                               | 11.9                     | 11.9                                |
| <b>Stranded</b>   | 1.5                                               | 8.6                      | 9.6                                 |
|                   | 2.5                                               | 12.6                     | 13.9                                |
|                   | 4                                                 | 16.6                     | 18.1                                |
|                   | 6                                                 | 21.2                     | 22.9                                |
|                   | 10                                                | 35.3                     | 36.3                                |
|                   | 16                                                | 47.8                     | 50.3                                |
|                   | 25                                                | 73.9                     | 75.4                                |

**Notes:**

- (a) These factors are for metal trunking and may be optimistic for plastic trunking, where the cross-sectional area available may be significantly reduced from the nominal by the thickness of the wall material.
- (b) The provision of spare space is advisable: however any circuits added at a later date must take into account grouping, Regulation 523.5.

**Table 9: Factors for trunking**

| Dimensions of trunking (mm x mm) | Factor | Dimensions of trunking (mm x mm) | Factor |
|----------------------------------|--------|----------------------------------|--------|
| 50 x 38                          | 767    | 200 x 100                        | 8572   |
| 50 x 50                          | 1037   | 200 x 150                        | 13001  |
| 75 x 25                          | 738    | 200 x 200                        | 17429  |
| 75 x 38                          | 1146   | 225 x 38                         | 3474   |
| 75 x 50                          | 1555   | 225 x 50                         | 4671   |
| 75 x 75                          | 2371   | 225 x 75                         | 7167   |
| 100 x 25                         | 993    | 225 x 100                        | 9662   |
| 100 x 38                         | 1542   | 225 x 150                        | 14652  |
| 100 x 50                         | 2091   | 225 x 200                        | 19643  |
| 100 x 75                         | 3189   | 225 x 225                        | 22138  |
| 100 x 100                        | 4252   | 300 x 38                         | 4648   |
| 150 x 38                         | 2999   | 300 x 50                         | 6251   |
| 150 x 50                         | 3091   | 300 x 75                         | 9590   |
| 150 x 75                         | 4743   | 300 x 100                        | 12929  |
| 150 x 100                        | 6394   | 300 x 150                        | 19607  |
| 150 x 150                        | 9697   | 300 x 200                        | 26285  |
| 200 x 38                         | 3082   | 300 x 225                        | 29624  |
| 200 x 50                         | 4145   | 300 x 300                        | 39428  |
| 200 x 75                         | 6359   |                                  |        |

**Note:** Space factor is 45% with trunking thickness taken into account.

## 7.2 Looping of Wiring Systems:

The looping of cables is bad practice and should be avoided.

## 7.3 Wiring System Bundles:

Cable bundles must be secured in accordance with the spacings defined in Table 2 based on the diameter of the smallest cable in the bundle.

## 7.4 Containment of cables:

Cabling shall be installed inside the cabling area of the CMS (unless designed otherwise) and be secured as per this guidance document. For example: cables shall not be tied directly to the outside of the CMS (See Appendix F).

## 7.5 Additional cable installations:

Additional cable installations shall not be cable tied directly to cables in a pre-existing installation as the sole means of support.

## 7.6 Plastic cable ties:

Plastic cable ties are a very popular method of securing bundles of cables to cable tray and other fixings. It should be noted that these are very high-risk items and the use should be limited, especially in Zone A and B.

## 7.7 Construction Fixing Devices (CFDs):

Construction Fixing Devices (CFDs) shall be selected under the advice from the CFD manufacturer to ensure that under the conditions of this document, Wiring Systems shall not be subject to premature collapse.

## 7.8 Suspension products:

Suspension products should be selected under the advice from the suspension manufacturer, and the installer must ensure that the suspension and its connection to the CFD and the CMS is secure and robust enough so that it shall not cause the wiring system to prematurely collapse.

## 7.9 Maximum limits of cable spillage:

To aid understanding of the horizontal and vertical limitations set out in sections 5 and 6 additional drawings are shown in Appendix A.

## 7.10 Inverted CMS:

Where CMS is used in an inverted orientation, the installation shall comply with 6.1.

Where cable tray or ladder is used in an inverted orientation, cable fixings must be used with the spacings defined in Table 2 and sub-clause 7.3.

## 7.11 False / Suspended Ceiling:

CMS and wiring systems shall not be secured to false or suspended ceilings.

Wiring systems shall be installed according to this document irrespective of the presence of a fire rated ceiling.



## 8. Conclusion

The intention of this guidance is to assist designers and installers in meeting the requirements of 521.10.202 regarding premature collapse. The guidance has been developed by BEAMA experts across the Cable Management sector and the London Fire Brigade. The team will continue this work to include the development of test methods and specifications for Cable Management products with the objective of improving installation safety.

## 9. Bibliography

### 9.1 BS 7671:2018+A4:2026

2018 Requirements for Electrical Installations. IET Wiring Regulations.

### 9.2 BS EN 50085 Series:

Cable trunking systems and cable ducting systems for electrical installations.

### 9.3 BS EN 61386 Series:

Conduit systems for cable management.

### 9.4 BS EN 61537:

Cable management. Cable tray systems and cable ladder systems.

### 9.5 BS EN 61914:

Cable cleats for electrical installations.

### 9.6 IEC 61084-1:

Cable trunking systems and cable ducting systems for electrical installations. General requirements.

### 9.7 BS EN 62275:

Cable Management Systems. Cable ties for electrical installations.

### 9.8 BS EN 12385-1:

The manufacture and testing of steel wire rope systems.

### 9.9 BS 8539:2012:

The code of practice for the selection and installation of post installed anchors in concrete and masonry.

### 9.10 Building Regulations (Fire Safety):

#### England

Approved Document B (fire safety) volume 1: Dwellings, 2019 edition incorporating 2020 amendments

Approved Document B (fire safety) volume 2: Buildings other than dwellings, 2019 edition incorporating 2020 amendments

#### Scotland:

Building (Scotland) Regulations 2004. Schedule 5

#### Wales:

Approved document part B volume 1 (dwellinghouses)

Approved document part B volume 2 (Buildings other

#### Northern Ireland:

Technical Booklet E (Fire Safety)

### 9.11 Hackitt Report:

Independent Review of Building Regulations and Fire Safety: Final Report.

<https://www.gov.uk/government/publications/independent-review-of-building-regulations-and-fire-safety-final-report>

### 9.12 Shirley Towers:

Report of the Hampshire Fire and Rescue Service investigation into the deaths of Firefighters Alan Bannon and James Shears in Flat 72, Shirley Towers, Church Street, Southampton, SO15 5PE, on Tuesday 6 April 2010

[https://www.ife.org.uk/write/MediaUploads/Incident%20directory/Shirley%20Towers%20-%202010/Shirley\\_Towers\\_-\\_Final\\_REDACTED\\_FRS.pdf](https://www.ife.org.uk/write/MediaUploads/Incident%20directory/Shirley%20Towers%20-%202010/Shirley_Towers_-_Final_REDACTED_FRS.pdf)

### 9.13 BRE Test report:

A series of experiments to assess the effect of fire on a selection of electrical cable supports and fixings.

<https://www.bre.co.uk/page.jsp?id=3652>

### 9.14 BS 5839 series

Fire detection and fire alarm systems for buildings – Code of practice for the design, installation, commissioning and maintenance.

### 9.15 BS 8519:2020

Selection and installation of fire-resistant power and control cable systems for life safety and fire-fighting applications. Code of practice.

10. Appendices

Appendix A

The dimensions shown are the maximum limits of cable spillage or CMS movement due to increased temperature in the event of a fire.

The following diagrams show various Cable management systems and guidance on their installation in accordance with the preceding document:

Figure 6: Tray, Ladder and Basket Examples

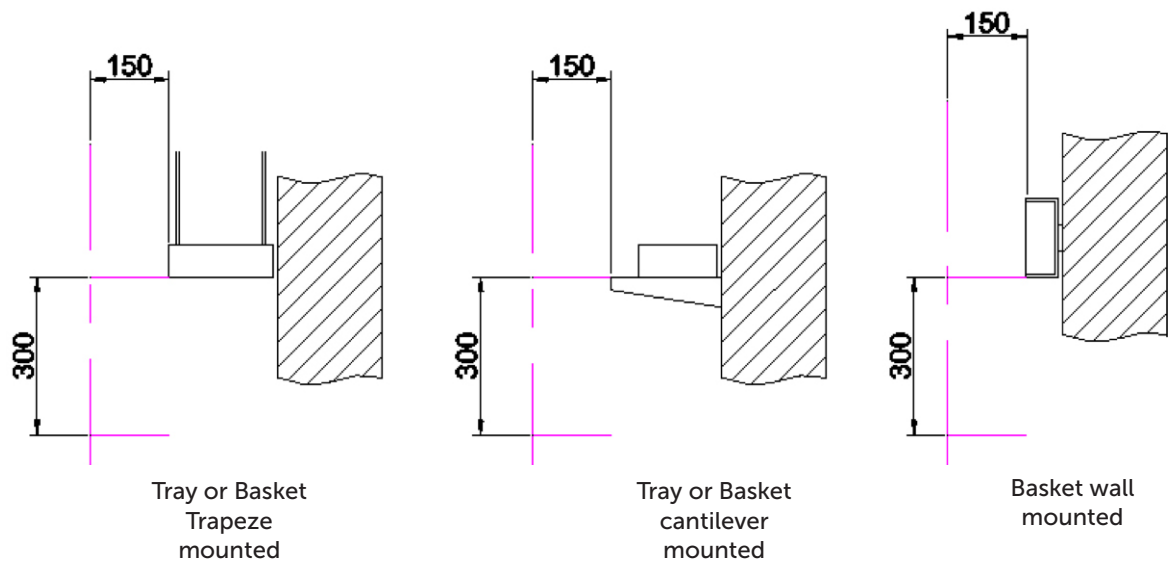


Figure 7: Trunking and Conduit – Horizontal runs on vertical face

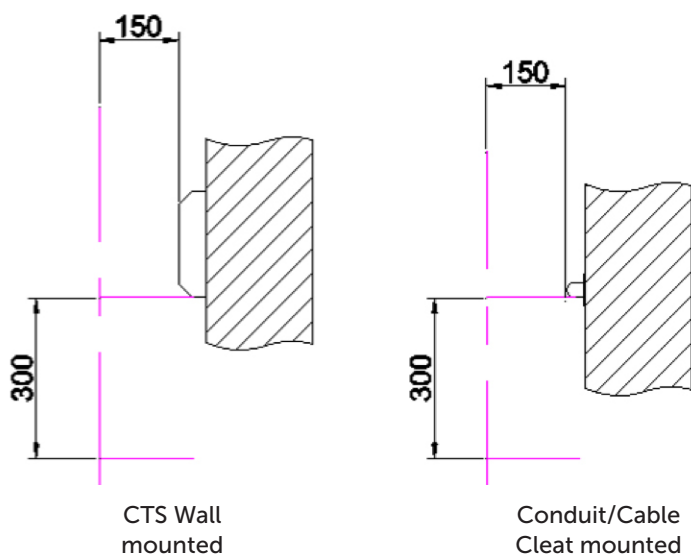


Figure 8: Trunking and Conduit – Internal Bends


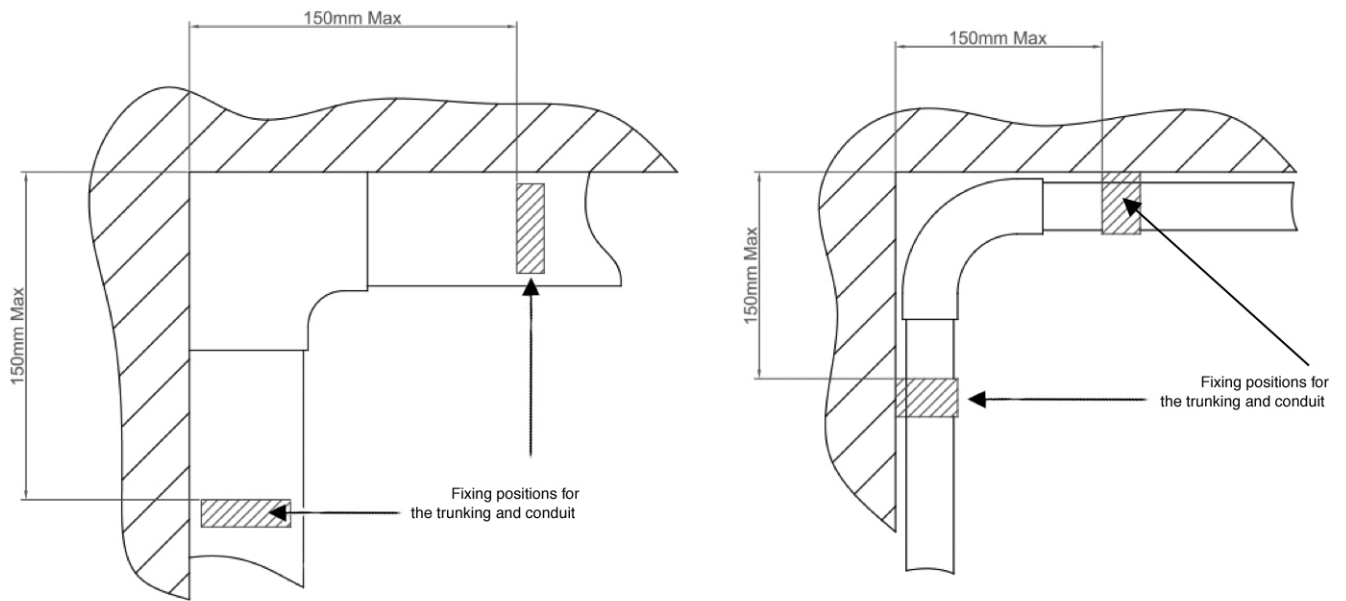


Figure 9: Trunking and Conduit – External Bends



## Appendix B

The following image is an example of cabling above a suspended ceiling. Which is not in CMS and / or secured.

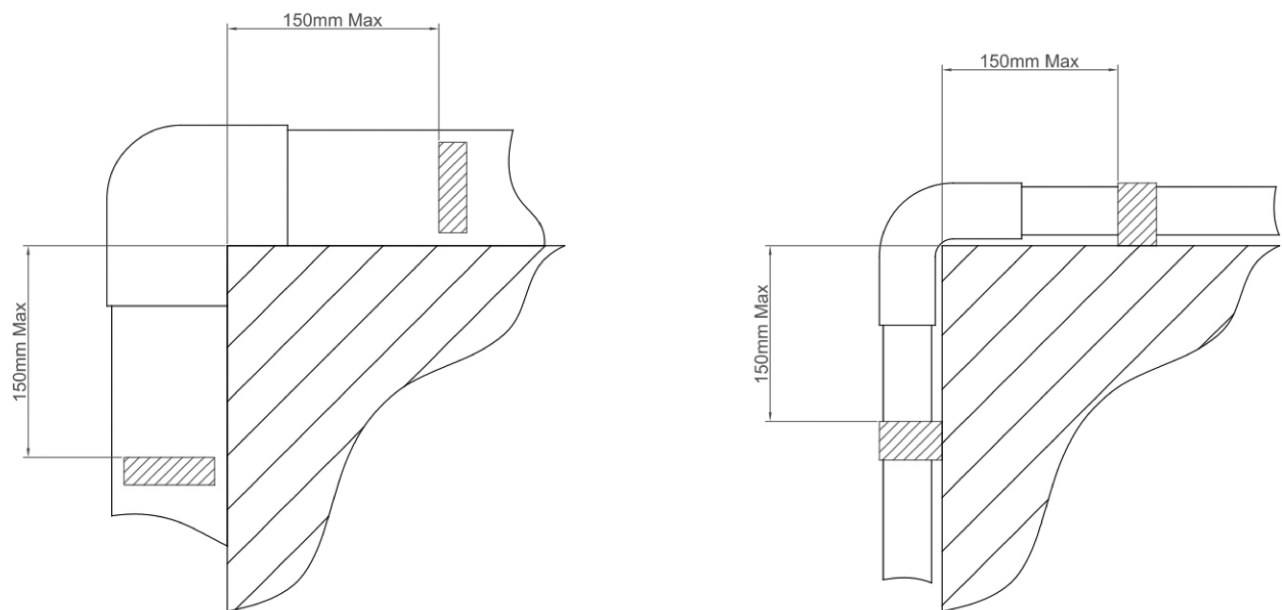

The following image is an example of cabling that has spilled from a trunking system and not secured to prevent 'premature collapse' in the event of a fire.



## Appendix C

The following are images from the Shirley Towers report:

Source: Hampshire Constabulary



Post-incident photograph showing conditions on the eleventh floor after the escape door from Flat 27 was left open, note the displaced cables.



Source: Hampshire Constabulary

Post-incident photograph of the eleventh floor landing showing displaced cables.

## Appendix D

The image shows an example of cable looping.




## Appendix E

Example of 'bundling/grouping':




## Appendix F

Examples of unacceptable loading of wiring systems:

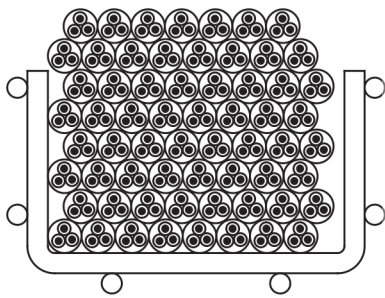

**Appendix F: Figure 1**

An example of over filled cable management.

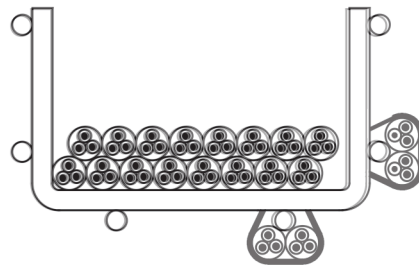


**Appendix F: Figure 2**

An example of cable ties or similar being used to support additional wiring.

NOT ACCEPTABLE




Examples of acceptable loading of wiring systems:

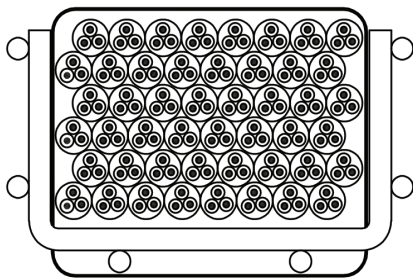

**Appendix G: Figure 3**

Stainless steel banding used to contain wiring system within and to the CMS.

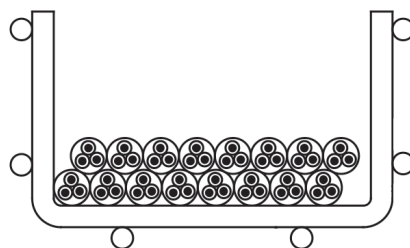

**Appendix F: Figure 4**

No external cables to the CMS and filled below the top edge.

ACCEPTABLE

